


**SLOW STOP
BOLLARD**



SlowStop Bollard-Type 2

4" Diameter

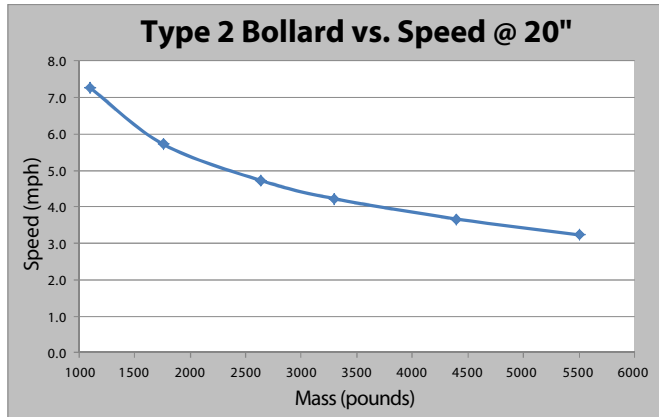

Color: Standard Yellow Bollard on Black Base

Diameter: 4" (3.5" ANSI Schedule 40)
Height: 42"

Set Screws: 5 M16 x 2.00
8mm Hex

Cap: Black Plastic

Installs with four (4) $\frac{5}{8}$ " x 5 $\frac{1}{2}$ "
Concrete Anchor Screws



SPECIFICATIONS

- Energy Absorption: 2,667 joules / 1,967 ft-lb.
- Temperature Rating: -40°
- Pipe Coating: 150 μ m Polyester Outdoor Powder Coat
- Cast Iron Coating: Environmentally Friendly Water-based KTL Coating.

RECOMMENDED USES

- Loading Docks and Warehouse Entrance Ramps
- Equipment and Storage Rack Guarding
- Drive-Thru Lanes
- Utility Protection
- Pedestrian Safety
- Access Denial
- Post-tensioned Concrete
- Not for K-Rated Security Use

Distributed by



5100 West Brown Deer Road
Brown Deer, WI 53208

1-800-236-0112
www.tapconet.com

