


TRI-GLO SERIES

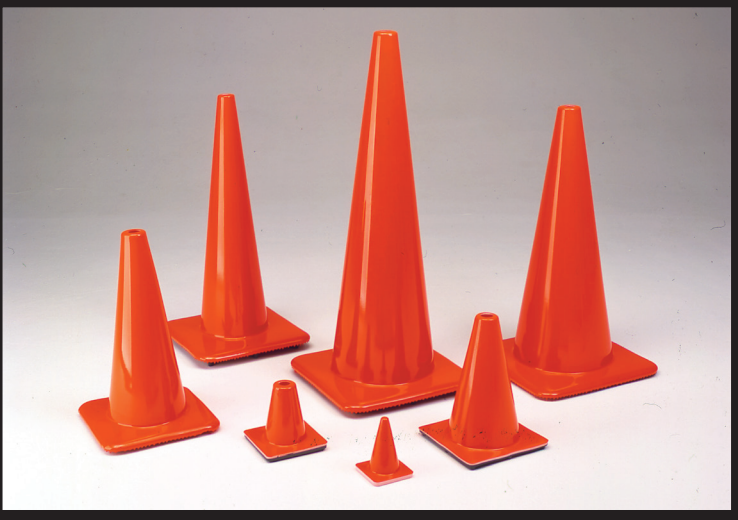

All vinyl construction assures durability and flexibility in all weather conditions.

Long lasting brilliant fluorescent color, available in Safety-Orange and Lime-Green, provides high visibility protection.

Ultraviolet stabilized color provides maximum resistance to fading.

High density base creates low center of gravity for maximum stability.

Choose from 6 sizes – 5", 6", 12", 18", 28", 36" – available in various weights and styles to meet specific needs.

Engineered to meet MUTCD specifications.

Options, such as stenciling, hot stamping, reflective collars, or flag adapters are available.

See reverse side for specifications.



Distributed by



1-800-236-0112
www.tapconet.com

5100 West Brown Deer Road
Brown Deer, WI 53223

 Contract Holder
GS-07F-5924R
GS-07F-0234U

 U.S. COMMUNITIES
GOVERNMENT PURCHASING ALLIANCE
Supplier Partner

TRI-GLO SERIES CONE SPECIFICATIONS

Model No	Height .in. / mm	Weight lbs. / kg	Wall Thickness		Dimensions for Cone Diagram		
			Top in.	Bottom in.	A in.	B in.	C in.
0550	5 / 127	.25 / .11	.050	.075	.75	2.75	4
0650	6 / 152	.88 / .40	.060	.075	2	4	6
1250	12 / 305	1.5 / .68	.065	.100	2	6.5	8.5
1850	18 / 457	3 / 1.36	.065	.120	2.19	7.25	11.5
1850-5	18 / 457	5 / 2.27	.075	.125	2.19	7.25	13.75
2825-5	28 / 711	5 / 2.27	.075	.130	1.75	7.5	13
2825-7	28 / 711	7 / 3.18	.075	.130	1.75	7.5	13.75
2825-10	28 / 711	10 / 4.54	.075	.130	1.75	7.5	15.25
2850-7	28 / 711	7 / 3.18	.075	.130	2.19	10.5	15.25
2850-8	28 / 711	8 / 3.63	.075	.130	2.19	10.5	15.25
2850-10	28 / 711	10 / 4.54	.075	.130	2.19	10.5	15.25
3650-8	36 / 914	8 / 3.63	.075	.130	2.75	10.5	15.25
3650-10	36 / 914	10 / 4.54	.075	.130	2.75	10.5	15.25
3650-12	36 / 914	12 / 5.44	.080	.130	2.75	10.5	15.25

Material

- One Piece Construction All PVC Cone
- Base - Black PVC
- Underliner Pink PVC
- Top Coat - Highly Pigmented PVC - UV Stabilized

Performance

- Tensile Strength 1200 psiz
- Elongation 200%
- Tear Strength 250 lbs/inch
- Hardness (Conical Section) 75 +/- 5 Shore A
- Heat Resistance No slump after 8 Hrs. @ 160° F
- Low Temperature Strength 10 ft/lb @ -5° F

Note: Weights and measurements have been rounded. Specifications are subject to change. Please contact Lakeside Plastics for current information.

